



ATLONA
VGA & STEREO AUDIO CAT5 EXTENDER
WITH CHAINABLE OUTPUT

USER MANUAL

MODELS: AT-2VGA300SL,
AT-4VGA300SL, AT-VGA300RL



TABLE OF CONTENTS

1. Introduction	1
3. Installation	2
4. Switch Settings	3
5. Specifications	4
6. Installation Tips	5
7. Safety Informations	6
8. Warranty	7

AT-2VGA300SL, AT-4VGA300SL (sender units) are designed to transfer VGA & Stereo Audio signal over cost effective CAT5 cable. AT-VGA300RL (receiver unit) has built in chainable output to cascade the other receiver for working range over 1000ft (300 meters).

This AV Extender is the smart, fast and cost-effective solution, eliminating costly and bulky VGA and Audio cables for the most efficient way to move multimedia content from player to display.

AT-2VGA300SL 1 X 3 VGA WITH STEREO AUDIO CAT5 EXTENDER (SENDER UNIT) & DISTRIBUTION AMPLIFIER - CHAINABLE FUNCTION

- Extends VGA and stereo audio over one UTP CAT5 cable.
- Needs to be used in pair with AT-VGA300RL (receiver unit)
- Supports analog stereo audio.
- Supports resolutions up to 1600x1200 @85Hz.
- Long range transmission up to 300 meters (Max.)
- Dual output: 1 VGA loop output for local, plus 2 x CAT5 RJ45 output for remote side.
- Built in equalization, gain adjustment, chainable CAT5 output on receiver unit.
- Receiver unit can be daisy chained to another AT-VGA300RL receiver to extended working range over 300 meters and multiple displays.
- Receiver unit local output: supports DDC, DDC2, DDC 2B, and provides virtual DDC, DDC backup function, to avoid the wrong setting at high resolution/frequency.
- Application for airports, train & bus stations, window display, trades shows and exhibitions.

AT-4VGA300SL 1 X 5 VGA WITH STEREO AUDIO CAT5 EXTENDER (SENDER UNIT) & DISTRIBUTION AMPLIFIER - CHAINABLE FUNCTION

- Needs to be used in pair with AT-VGA300RL (receiver unit)
- Dual output: 1 VGA loop output for local, plus 4 x CAT5 RJ45 output for remote side.
- Each VGA display requires one AT-VGA300RL receiver at remote side. (Order separately).
- Use CAT5 cable instead of VGA cable.
- Long range transmission up to 300 meters (Max.).
- Built in equalization, gain adjustment, chainable CAT5 output at AT-VGA300RL receiver unit.
- Supports up to 1600x1200 @85Hz.

OPTIONAL MODEL:

AT-VGA300RL VGA WITH STEREO AUDIO CAT5 EXTENDER (RECEIVER UNIT) - CHAINABLE FUNCTION

- Work with AT-2VGA300SL, AT-4VGA300SL as receiver for extra remote VGA displays
- It can be daisy chained for another AT-VGA300RL to extended working range over 300M (1000ft)
- Built in equalization, gain adjustment.
- Supports up to 1600x1200 @85Hz.


INSTALLATION

CABLE:


Video Link cable using hi quality CAT5E UTP/STP or CAT6 UTP cable. Recommended wiring 568-B
Please note STP cable can enhance noise rejection, as well less transmission range and picture sharpness quality.

PANEL VIEW:

AT-2VGA300SL

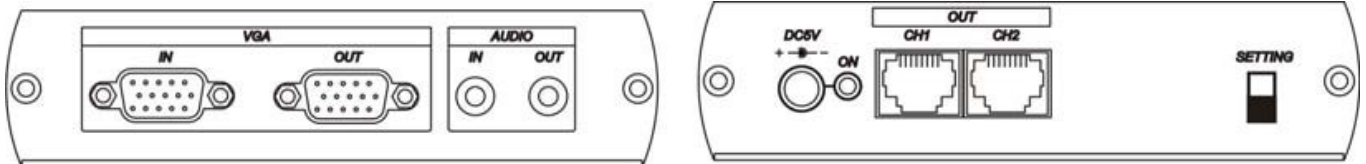


AT-4VGA300SL

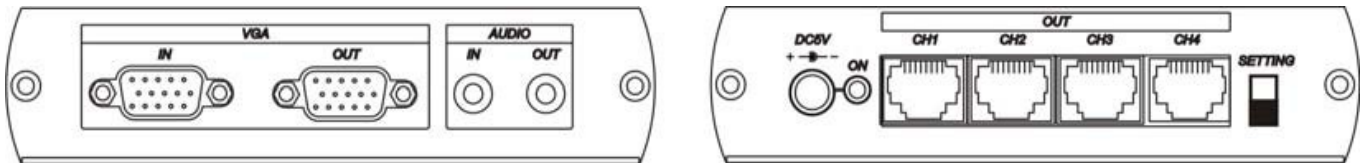

AT-VGA300RL



VIEW OF INSTALLATION:

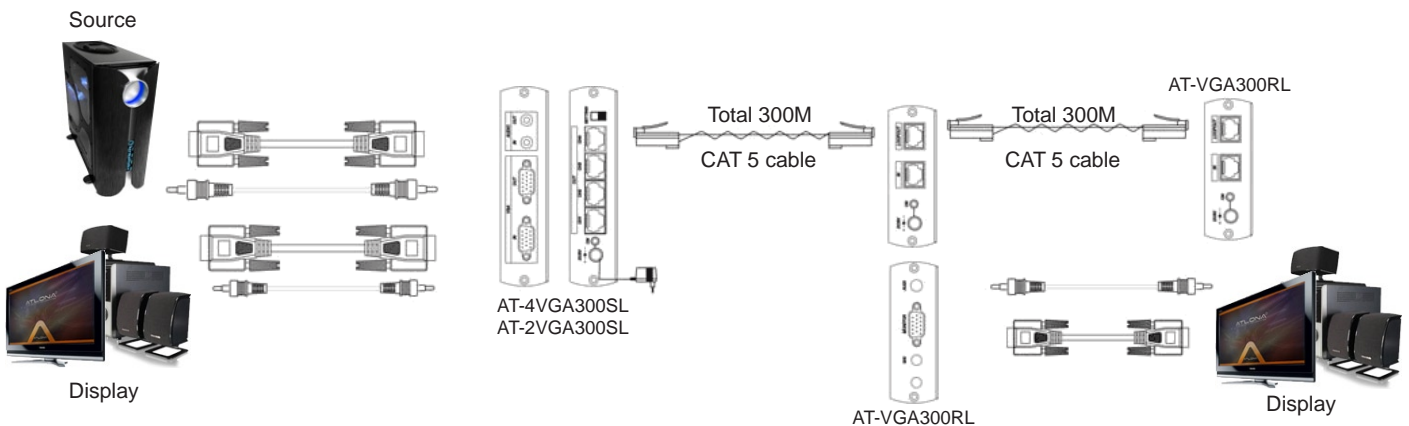

AT-2VGA300SL/AT-4VGA300SL SWITCH SETTINGS:

DIP Switcher Setting

1	2	
↑	↑	setup built in DDC (1280x1024@75Hz Max)
↓	↑	setup DDC of local monitor
↑	↓	setup DDC backup of local monitor
↓	↓	backup DDC of local monitor

AT-2VGA300SL LED:

Blue (front panel): power on/off

RJ45 LED (Link cable connector) :

Yellow LED status indication:

No light:	Normal
Light:	Waiting local Monitor connection (duplication DDC mode)
Blink one time:	Finish DDC backup (duplication DDC mode)
Blink two times:	Monitor DDC reading error (duplication DDC mode)
Blink three times:	DDC check sum error
Blink four times:	Memory read error
Blink five times:	Memory writes error
Blink six times:	Memory verify error

AT-2VGA300SL/AT-4VGA300SL Duplicate DDC step:

1. Dip switch 1 & 2 at "down" position, if the Sender already connected to the local monitor; please jump to the third step.
2. If Sender has not connected with local monitor yet, the yellow LED will keep lit to wait local monitor connection.
3. After few seconds DDC duplication will finish, then yellow LED will be off.
4. If the duplication is successful, the yellow LED will blink one time. If failed, yellow LED will blink several times, please refer to above "Yellow LED status indication"
5. Please unplug the local monitor after finishing the DDC duplication, and move dip switch 2 at "down", 1 at "up", then start to use DDC data which have beenduplicated.

AT-VGA300RL Remote unit adjustment:

EQ equalization (sharpness)

Gain signal boost (brightness)

AT-VGA300RL LED:

Blue (front panel): power on/off

RJ45 LED (Link cable connector):

Green: power on/off

Caution:

The cabling must keep away from any equipment with electromagnetic wave, i.e.:microwave, radio equipment, high voltage lines.


SPECIFICATIONS

ITEM NO.	AT-2VGA300SL	AT-4VGA300SL
Resolution	Up to 1600 x 1200	
Video Bandwidth	Sender 750MHz / Receiver 350MHz-3db	
Video Input / Output	RGB Analog, 75Ω, 0.7Vp-p	
Sync Input / Output	H/V Separated, 5V TTL	
Horizontal Frequency	30-95 KHz	
Vertical Frequency	50-180 Hz	
VGA Connector	15-pin Mini D-Sub (High Density)	
Analog Audio Input / Output	10KΩ, 3Vp-p (Max)	
Analog Audio Bandwidth	20-20KHz-3dB	
Analog Audio Connector	3.5mm Stereo Phone jack	
Link Connector	2 x RJ-45	4 x RJ-45
Max Distance	Up to 1000 ft. (300M)	
Power Supply	5V DC 2000mA Regulated (External)	
Power Consumption	500mA (Max)	500mA (Max)
Dimensions (mm)	125x 95 x 30	125x 95 x 30
Weight (g)	280	280


ITEM NO.	AT-VGA300RL
Resolution	Up to 1600 x 1200
Video Bandwidth	150MHz
Video Output	RGB Analog, 75Ω, 0.7Vp-p
Sync Output	H/V Separated, 5V TTL
Horizontal Frequency	30-95 KHz
Vertical Frequency	50-180 Hz
VGA Connector	15-pin Mini D-Sub (High Density)
Analog Audio Output	10KΩ, 3Vp-p (Max)
Analog Audio Bandwidth	20-20KHz
Analog Audio Bandwidth	20-20KHz
Analog Audio Connector	3.5mm Stereo Phone jack
Link Connector	RJ-45
Max Distance	Up to 1000 ft. (300M)
Power Supply	5V DC 2000mA Regulated (External)
Power Consumption	600mA (Max)
Dimensions (mm)	88x 95 x 30
Weight (g)	200

INSTALLATION TIPS

1. Due to the inside of CAT5 cable containing pairs of wires twisted at different rates, and the different quality on the cable itself and installation, different signal arrival time may occur at each-pair. If there is a big difference at arrival time, that will cause RGB skew status. This is seen on the monitor as separation, or lack of convergence in colors. Normally it happens on long CAT 5 cable runs.

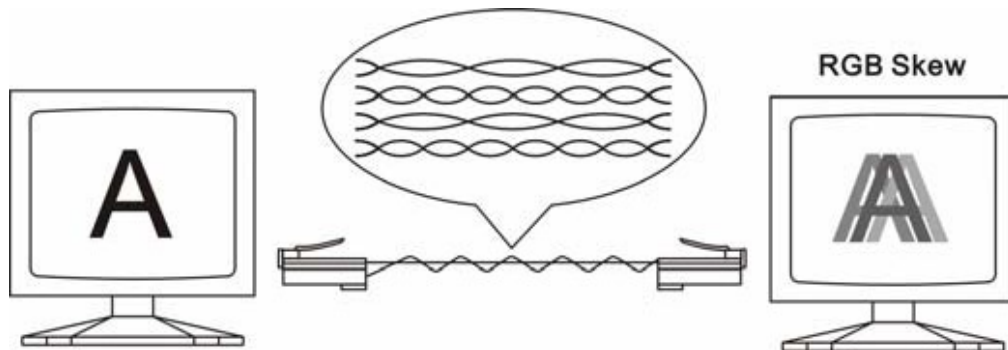

2. Recommend to use following cabling design to reduce skew status, and to add special made "skew immunized adaptor" (2 pieces included at the package).

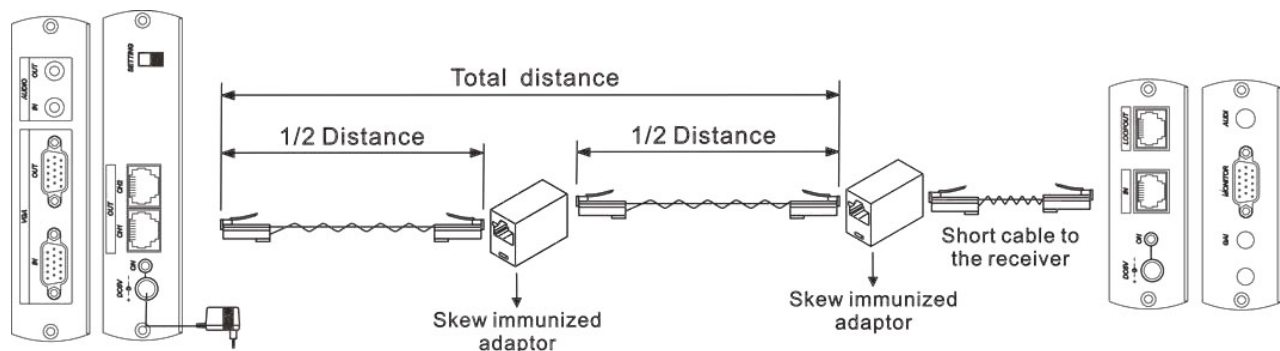

T568A and T568B Wiring

T568B RECOMMENDED FOR ALL SOLUTIONS

Pin	T568A Pair	T568B Pair	Wire	T568A Color	T568B Color	Pins on plug face (socket is reversed)
1	3	2	tip	white/green stripe	white/orange stripe	
2	3	2	ring	green solid	orange solid	
3	2	3	tip	white/orange stripe	white/green stripe	
4	1	1	ring	blue solid	blue solid	
5	1	1	tip	white/blue stripe	white/blue stripe	
6	2	3	ring	orange solid	green solid	
7	4	4	tip	white/brown stripe	white/brown stripe	
8	4	4	ring	brown solid	brown solid	

Safeguards

To reduce the risk of electric shock, do not expose this product to rain or moisture.

If the wall plug does not fit into your local power socket, hire an electrician to replace your obsolete socket.

Do not modify the wall plug. Doing so will void the warranty and safety features.

This equipment should be installed near the socket outlet and the device should be easily accessible in case it requires disconnection.

Precautions

FCC Regulations state that any unauthorized changes or modifications to this equipment not expressly approved by the manufacturer could void the user's authority to operate this equipment.

Operate this product using only the included external power supply. Use of other power supplies could impair performance, damage the product or cause fires.

In the event of an electrostatic discharge, this device may automatically turn off. If this occurs, unplug the device, and plug it back in.

Protect and route power cords so they will not be stepped on or pinched by anything placed on or against them. Be especially careful of plug-ins, or cord exit points from this product.

Avoid excessive humidity, sudden temperature changes or temperature extremes.

Keep this product away from wet locations such as bathtubs, sinks, laundries, wet basements and swimming pools.

Use only accessories recommended by ATLONA to avoid fire, shock or other hazards.

Unplug the product before cleaning. Use a damp cloth for cleaning. Do not use cleaning fluid or aerosols, which could enter the unit and cause damage, fire or electrical shock. Some substances may also mar the finish of the product.

Never open or remove unit panels or make any adjustments not described in this manual. Attempting to do so could expose you to dangerous electrical shock or other hazards. It may also cause damage to your AT-2VGA300SL, AT-4VGA300SL, AT-VGA300RL. Opening the product will void the warranty.

Do not attempt to service the unit. Instead disconnect it and contact your Authorised ATLONA reseller or contact ATLONA directly.

WARRANTY

LIMITED ONE-YEAR WARRANTY

ATLONA by Lenexpo Electronics warrants only to the initial purchaser of this product for a period of one year from the date of purchase from an Authorized ATLONA Reseller, the product will be free of electrical and mechanical defects that materially affect the products operation as described in this users manual. Within this period, ATLONA will, at it's sole option, repair or replace any components, which fail of normal use or refund the net original price.

DISCLAIMER OF WARRANTY

ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE LIMITED TO ONE YEAR FROM PURCHASE; ALL OTHER EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF NON-INFRINGEMENT, ARE DISCLAIMED. Some jurisdictions do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. This warranty gives you specific legal rights, and you may also have other rights, which vary by jurisdiction.

LIMITATION OF LIABILITY

TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT WILL ATLONA OR ITS SUPPLIERS BE LIABLE FOR ANY LOST REVENUE, PROFIT OR DATA, OR FOR SPECIAL, INDIRECT, CONSEQUENTIAL, INCIDENTAL, OR PUNITIVE DAMAGES, HOWEVER CAUSED REGARDLESS OF THE THEORY OF LIABILITY, ARISING OUT OF OR RELATED TO THE USE OF OR INABILITY TO USE THE PRODUCT, EVEN IF ATLONA HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN NO EVENT ATLONA'S LIABILITY TO YOU, WHETHER IN CONTRACT, TORT (INCLUDING NEGLIGENCE), OR OTHERWISE, EXCEED THE AMOUNT PAID BY YOU FOR THE PRODUCT. The foregoing limitations will apply even if any warranty or remedy provided to you fails its essential purpose. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation of or exclusion may not apply to you.

Disclaimer

This document is provided for technical information for the user. It does not create any warranty with respect to the product, and does not modify or enhance the terms of the warranty that may accompany this product.

ATLONA reserves the right to modify the information in this document as necessary.

ATLONA holds no responsibility for any errors that may appear in this document. Customers should take appropriate action to ensure their use of the product does not infringe upon any patents. ATLONA respects valid patent rights of third parties.

Trademarks and Copyrights All other product names or marks referenced herein are trademarks or registered trademarks of their respective owners.

ATLONA

